

DIAPHRAGM PUMP 12 VOLT

3.0 GPM
11.4 L/min

AVAILABLE
PORT OPTIONS

QA QUICK
ATTACH
PORTS

1/2" NPT
PORTS



- Polypropylene Pump Housing and Valve Plate
- Zinc Plated Steel fasteners
- Painted Steel 3" Motor Shell
- 1/2" FNPT & QA Port Option
- CE Approved
- 60 PSI (4.1 Bar) Max
- 3.0 GPM (11.4 LPM) Max
- Self Priming to 8 Feet
- Max Fluid Temp 140 Deg F
- 12V DC
- 10.0 Max Amps
- 5.6 lbs Dry



**CORROSION RESISTANT VITON® VALVES
AND SANTOPRENE™ DIAPHRAGM.**

INLINE FUSE PROTECTION





Honeywell
MICRO SWITCH™

APPROVED FOR USE WITH
Roundup®
AGRICULTURAL HERBICIDES

MODEL	DESCRIPTION	PORTS	PACKAGING	UPC
EF3000	3.0 GPM 12 Volt Diaphragm Pump	1/2" FNPT	Bulk	N/A
EF3000-BC	3.0 GPM 12 Volt Diaphragm Pump	1/2" FNPT	Barcoded	81448501344-4
EF3000-BOX	3.0 GPM 12 Volt Diaphragm Pump	1/2" FNPT	Boxed	81448501041-2
EF3000-QA	3.0 GPM 12 Volt Diaphragm Pump	QA	Bulk	N/A
EF3000-QA-BOX	3.0 GPM 12 Volt Diaphragm Pump	QA	Boxed	81448501379-6
EF3000-KIT	3.0 GPM Replacement Pump Head, Fully Assembled	1/2" FNPT	Boxed	81448501339-0
EF3000-QA-KIT	3.0 GPM Replacement Pump Head, Fully Assembled	QA	Boxed	81448501865-4

TECHNICAL SPECIFICATIONS

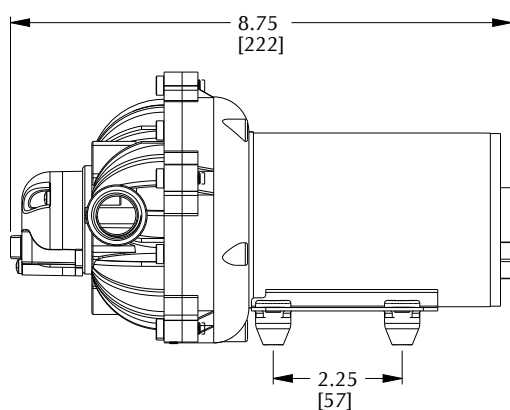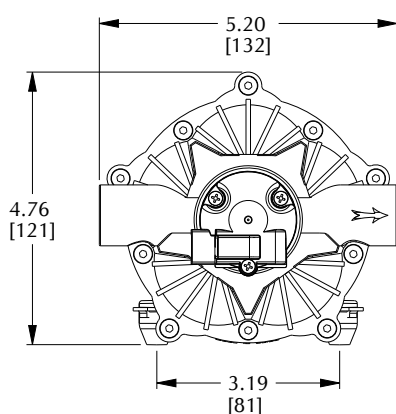

Pressure PSI/Bar	Current (Amps)	Flow GPM/LPM
0/0	3.9	3.8/14.38
10/1.7	5.4	3.4/12.87
20/1.4	6.7	3.1/11.73
30/2.1	8.1	2.8/10.60
40/2.8	9.2	2.5/9.46
50/3.4	10	2.2/8.33
60/4.1	N/A	N/A