




TESTINA REGOLABILE AN25 AN25 ADJUSTABLE NOZZLE

NOTA INTEGRATIVA – FEATURES

- **Dimensioni ridotte**
 - *Small size*
- **Facilità di regolazione da alta a bassa pressione e viceversa**
 - *Easy adjustment from high to low pressure and from low to high*
- **Robusta costruzione in ottone**
 - *Strong brass construction*
- **Tenuta con OR e antiestrusione**
 - *Seal with O-Ring and backup ring*
- **Elevata protezione dagli urti accidentali grazie alla copertura in gomma**
 - *High protection from accidental knocks thanks to rubber cap*
- **Ghiera di fissaggio in materiale plastico ad elevata resistenza**
 - *Fixing ring made of highly resistant plastic material*
- **In posizione di alta pressione, tenuta realizzata tra cono e ghiera in ottone**
 - *In the high-pressure position, seal realized between brass cone and ring nut*

MISURE D'INGOMBRO – OVERALL DIMENSIONS

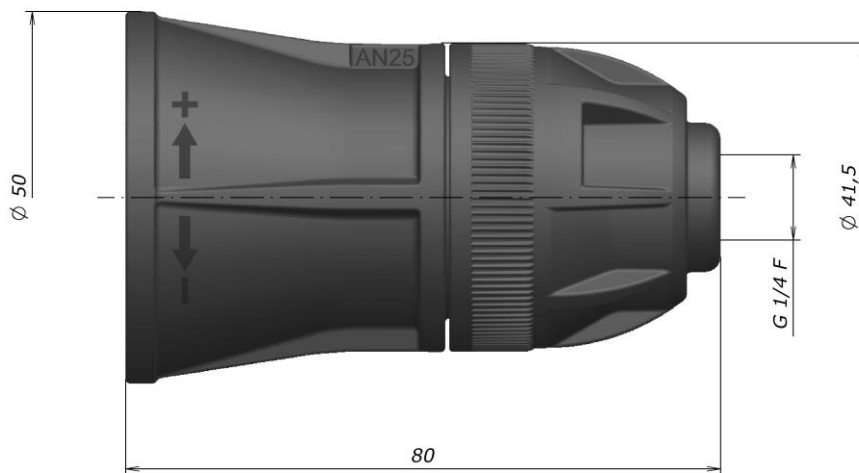

PRESSIONE NOMINALE <i>RATED PRESSURE</i>	250 bar 25 MPa <i>3650 psi</i>	PRESSIONE AMMISSIBILE <i>PERMISSIBLE PRESSURE</i>	280 bar 28 MPa <i>4060 psi</i>
PORTATA NOMINALE <i>RATED FLOW</i>	30 l/min <i>8 USGpm</i>	TEMPERATURA NOMINALE <i>RATED TEMPERATURE</i>	160 °C <i>320 °F</i>

CODICE <i>(CODE)</i>	ENTRATA <i>INLET</i>	USCITA <i>OUTLET</i>	PESO <i>WEIGHT</i>
4050502000	G 1/4 F	1/4 NPT	170 g – 6 oz
4050502001	G 1/4 F	1/8 NPT	170 g – 6 oz