

CEILING BOOM INLINE

- ✓ 360° rotation
- ✓ polished stainless steel
- ✓ tough design
- ✓ self lubricated ball bearing
- ✓ high quality swivels included
- ✓ insulated high pressure hose
- ✓ hose protection / tension relief
- ✓ ready to use



Technical Data

Pressure	275 bar (27.5 MPa)
Temperature	120°C
Inlet (top & side)	G1/4" F (or on request)
Outlet	G1/4" M (or on request)
Throughput medium	pH 3 - 12



DKP

Part No.	L	Weight
66.003	1450	9.6kg
66.013	1600	9.9kg
66.023	1750	10.2kg
66.033	1900	10.5kg
66.043	2050	10.8kg
66.053	2250	11.1kg
66.063	2500	11.4kg
66.073	2750	11.7kg
66.083	3000	12.0kg
66.959	5750	18.0kg



DKF (with flex-arm)

Part No.	L	Weight
66.503	1450	10.2kg
66.513	1600	10.5kg
66.523	1750	10.6kg
66.533	1900	11.7kg
66.543	2050	10.8kg
66.553	2250	11.8kg
66.563	2500	12.3kg
66.573	2750	12.9kg
66.583	3000	13.2kg




DKR (hexagon shape)

Part No.	L	Weight
62.041	1450	9.7kg
62.021	1600	10.1kg
62.001	1750	10.5kg





Accessories see page 71

Ceiling Mounting Plate



Bearable load for each bore
at least 30'000 N
(for example M12 screw)

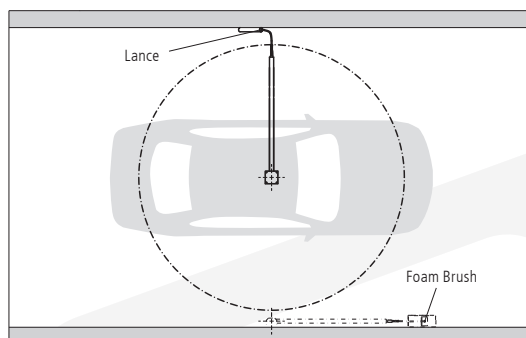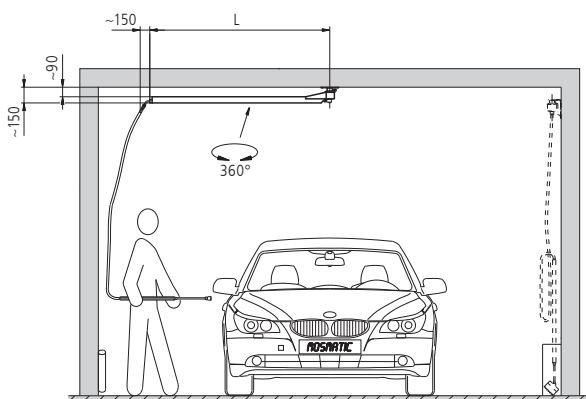

C30

Legend

M.. = metric thrust, **..M** = male, **F** = female, **G** = gas pipe thrust, **QV** = quick connects, **SV** = profile ring fitting
D = diameter, **k** = conical, **L** = length, **NW** = nominal width, **SW** = wrench size, **IN** = media input, **OUT** = media output, **RS** = basic position