


- ✓ Saltwater resistant
- ✓ Quadruple bearing system
- ✓ Carbide gasket system
- ✓ Stainless steel

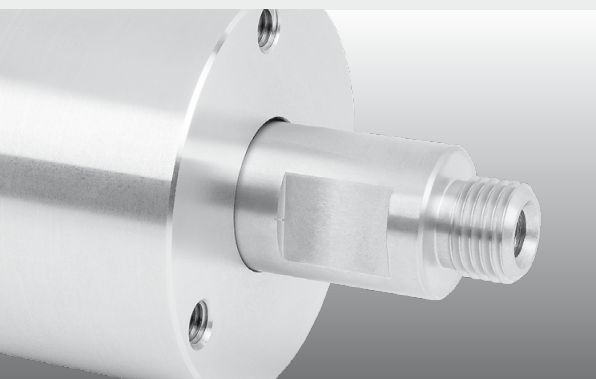


Application

Underwater application (saltwater/freshwater), high RPM/pressure, thrust and radial forces




TECHNICAL DATA

Pressure	350 bar (35 MPa)
Temperature	120°C
RPM	max. 2'000 rpm
Body	stainless steel
Inner part	stainless steel
Seal	carbide
Bearing	ceramic 2x radial ball bearings 2x thrust ball bearings
Throughput medium	pH 3 - 12 10 µm filtered 20 bar compressed air

Flow / Durchfluss

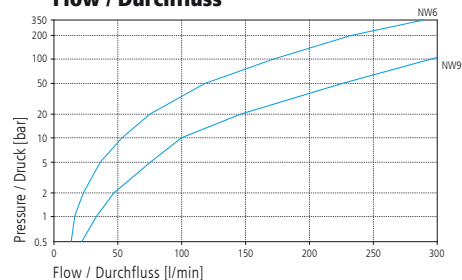

Torque / Drehmoment

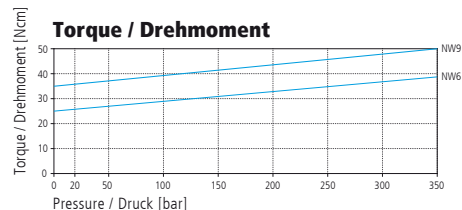

DYKI

Part No.	G1 (F)	G2 (M)	NW	SW1	L1	L2	L3	D1	D2	Weight
54.001	G1/4" F	G1/4" M	6	16	71	107	10	55	20	1150g
54.103	G3/8" F	G3/8" M	6	16	71	107	12	55	20	1150g
54.603	G3/8" F	G3/8" M	9	16	73	109	12	55	20	1160g

36.916	NW 6 Seal kit
36.917	NW 9 Seal kit