Menu

PA	EQUIPAGGIAMENTI TECNICI LAVAGGIO	26.1412.40-43-45-48 SW 35	I GB	4
				07/11/08

CARATTERISTICHE TECNICHE *SPECIFICATIONS*

– PRESSIONE NOMINALE *RATED PRESSURE*	350 bar – 35 MPa (5100 psi)
– PRESSIONE CONSENTITA *PERMISSIBLE PRESSURE*	390 bar – 39 MPa (5650 psi)
– PORTATA MASSIMA *MAX FLOW RATE*	40 l/min (10.5 USG p.m.)
– TEMPERATURA MASSIMA DI LAVORO (UTILIZZO CONTINUO) *MAX WORKING TEMPERATURE (CONTINUOUS USE)*	90 °C (194 °F)
– TEMPERATURA MASSIMA AMMESSA (SOLO PER BREVI PERIODI) *MAX PERMISSIBLE TEMPERATURE (FOR SHORT PERIODS ONLY)*	120° C (250°F)
– NUMERO DI GIRI MAX *MAX RPM*	VEDERE DIAGRAMMA *SEE CHART*
– COPPIA ALLA PRESSIONE NOMINALE *TORQUE AT RATED PRESSURE*	~ 0.18 Nm (1.6 Lbs.in)
– MATERIALE *MATERIAL*	CORPO IN OTTONE NICHELATO, PERNO IN ACCIAIO INOX *NICKEL PLATED BRASS BODY, STAINLESS STEEL PIN*
– GUARNIZIONI *SEALS*	TENUTE IN MATERIALE CERAMICO; OR TENUTA ACQUA IN FKM (VITON); OR TENUTA GRASSO IN FKM (VITON) E SILICONE *SEALS MADE OF CERAMIC MATERIAL; O-RING WATER SEALS IN FKM (VITON); O-RING GREASE SEALS IN FKM (VITON) AND SILICON*
– CUSCINETTI *BEARINGS*	N.2 CUSCINETTI A SFERE IN ACCIAIO INOX AUTOLUBRIFICANTI A TENUTA STAGNA *NR. 2 SELF LUBRICATED WATER TIGHT SST BALL BEARING*

MISURE D'INGOMBRO *OVERALL DIMENSIONS*

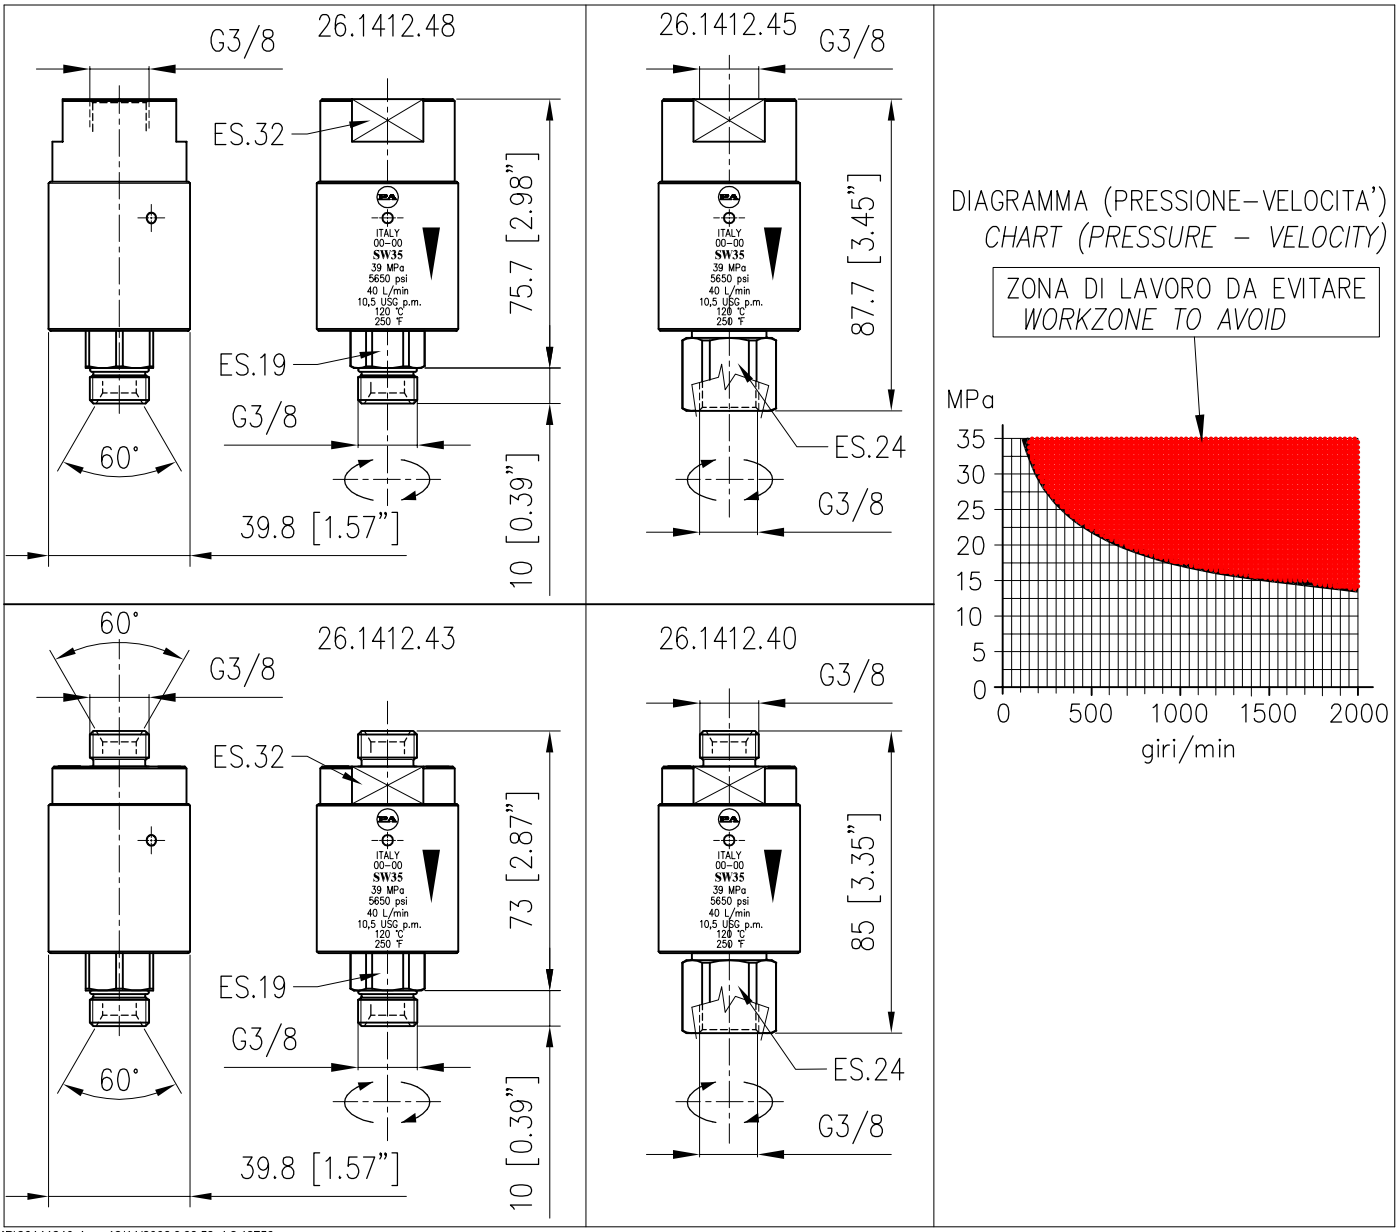


DIAGRAMMA (PRESSIONE–VELOCITA')
CHART (PRESSURE – VELOCITY)

ZONA DI LAVORO DA EVITARE
WORKZONE TO AVOID