




E100-1001

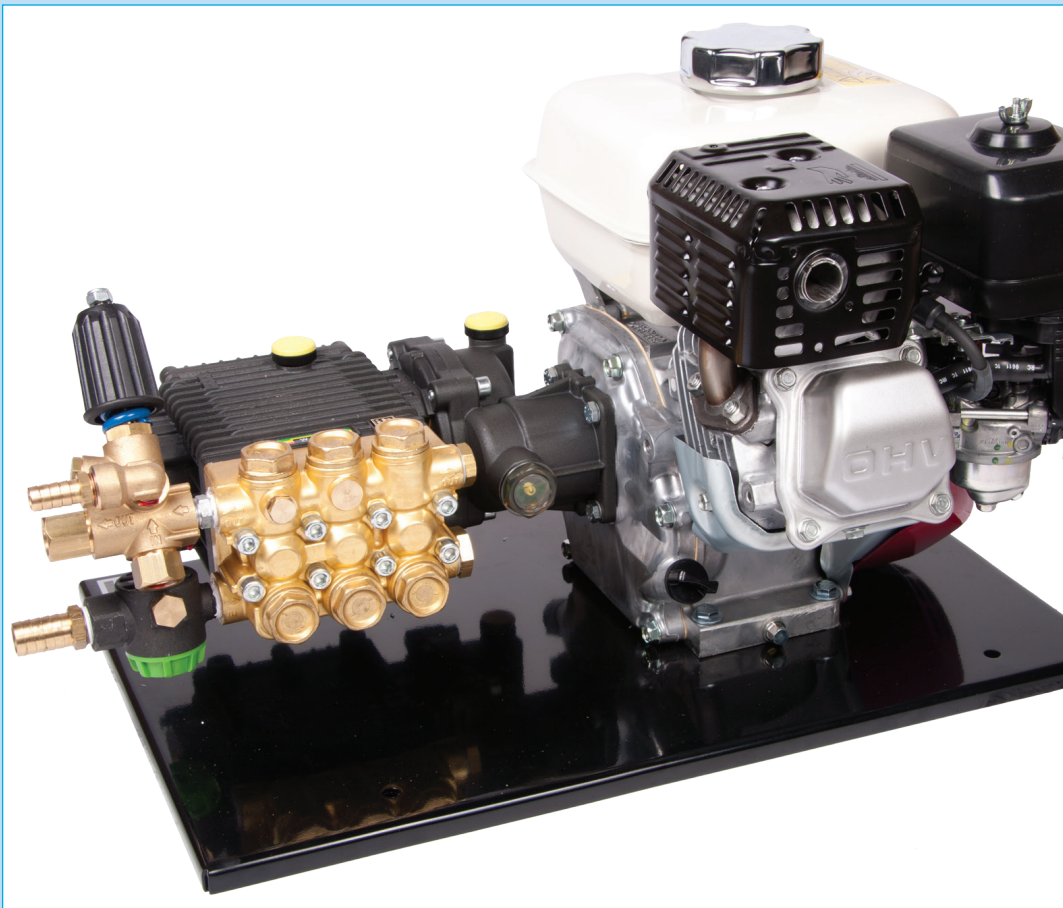

**12
Lpm**

**140
Bar**

**2030
Psi**

**Petrol
Honda**

E100-1001

12

Lpm

140

Bar



POWERED by
HONDA



**Interpump
44 Series**



**Honda GX160
Engine**

General

Weight	37Kg
Dimensions	L620 - W400 - H360 mm
Frame	Mounted on baseplate
Unloader valve outlet	3/8" BSP female thread
Unloader valve bypass	15mm hose barb
Suction filter inlet	3/4" hose barb
Max fluid temperature	60°C

Pump & Auxiliaries

Make & Model	Interpump 44 series - W140M
Flow	12 Lpm
Pressure	140 Bar - 2030 Psi
Lubrication	Oil splash
Materials	Ceramic plungers & brass manifold
Speed	1450 Rpm
Drive	Interpump RS99 reduction gearbox
Pressure control	VRT3 adjustable unloader valve
By-pass system	External return to tank system

Engine

Make	Honda
Model	GX160K1QX
Power	5.5Hp - Gross / 4.8Hp - Net*
Fuel capacity	3.1 Litres
Lubrication	Oil splash
Oil alert	Low level engine shutdown system
Cooling	Air cooled
Fuel system	Carburettor
Starting	Recoil
Ignition	Transistorised pointless

*Net power @ 3600 Rpm in accordance with SAE J1349

Dealer Stamp

