


	EQUIPAGGIAMENTI TECNICI LAVAGGIO	ATTACCO RAPIDO A SFERA 250 BAR BALL QUICK COUPLING 250 BAR ARS 250	①	5	06/02/06
			GB		




SPECIFICHE TECNICHE
SPECIFICATIONS

- PRESSIONE NOMINALE RATED PRESSURE	250 bar – 25 MPa (3650 psi)
- PRESSIONE CONSENTITA PERMISSIBLE PRESSURE	280 bar – 28 MPa (4050 psi)
- PORTATA MASSIMA MAX FLOW RATE	30 l/min (8 USG p.m.)
- TEMPERATURA MASSIMA MAX WORKING TEMPERATURE	90° C (195 °F)
PERNO IN ACCIAIO NICHELATO E CORPO IN OTTONE NICHELATO CON GUARNIZIONI OR IN NBR PIN IN NICKEL PLATED STEEL AND BODY IN NICKEL PLATED BRASS WITH NBR O RINGS	

MISURE D'INGOMBRO
OVERALL DIMENSIONS

CODICE CODE	A	B	C	D	E
26.2010.00		G3/8 M			ES.24 [0.94"]
26.2010.10		G3/8 F			ES.24 [0.94"]
26.2010.20		G1/4 F			ES.24 [0.94"]
26.2010.30		G1/2 F			ES.27 [1.06"]
26.2010.40		G1/2 M			ES.24 [0.94"]
26.2015.61	G3/8 F		ES.22 [0.87"]	40 [1.57"]	
26.2016.61	G1/4 F		ES.19 [0.75"]	40 [1.57"]	
26.2023.61	G3/8 M		ES.19 [0.75"]	42 [1.65"]	
26.2024.61	G1/2 M			42 [1.65"]	

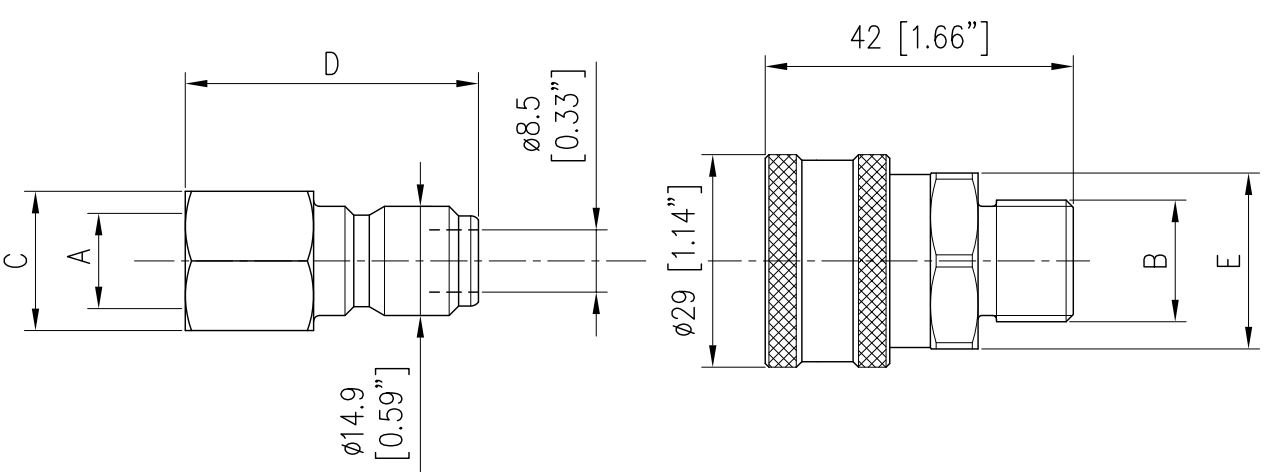

Technical drawing of the ball quick coupling showing dimensions A, B, C, D, and E. The drawing includes a side view and a front view. Dimensions are given in both inches and millimeters.

- Dimension A: Distance from the end of the pin to the start of the body.
- Dimension B: Distance from the end of the pin to the end of the body.
- Dimension C: Total length of the pin.
- Dimension D: Distance from the start of the body to the end of the pin.
- Dimension E: Total length of the body.

Other dimensions shown in the drawing:

- Pin diameter: $\phi 8.5$ [0.33"]
- Pin thread: $\phi 14.9$ [0.59"]
- Body diameter: $\phi 29$ [1.14"]
- Body length: 42 [1.66"]